



②			
B-3			
アスファルト殻寸法			
	設計値	実測値	差
L		950	
W		620	
t		360	



②			
B-3			
アスファルト殻寸法			
	設計値	実測値	差
L		950	
W		620	
t		360	



②			
B-3			
アスファルト敷寸法			
	設計値	実測値	差
L		950	
W		620	
t		360	





③			
A-2			
アスファルト殻寸法			
	設計値	実測値	差
L		900	
W		550	
t		170	



③			
A-2			
アスファルト殻寸法			
	設計値	実測値	差
L		900	
W		550	
t		170	



③			
A-2			
アスファルト殻寸法			
	設計値	実測値	差
L		900	
W		550	
t		170	



③			
A-2			
コンクリート殻寸法			
	設計値	実測値	差
L		500	
W		700	
t		260	



③			
A-2			
コンクリート殻寸法			
	設計値	実測値	差
L		500	
W		700	
t		260	



③			
A-2			
コンクリート殻寸法			
	設計値	実測値	差
L		500	
W		700	
t		260	



③			
A-3			
アスファルト殻寸法			
	設計値	実測値	差
L		500	
W		620	
t		190	



③			
A-3			
アスファルト殻寸法			
	設計値	実測値	差
L		500	
W		620	
t		190	



③			
A-3			
アスファルト殻寸法			
	設計値	実測値	差
L		500	
W		620	
t		190	






④			
A-2			
コンクリート殻寸法			
	設計値	実測値	差
L		450	
W		350	
t		190	



④			
A-2			
コンクリート殻寸法			
	設計値	実測値	差
L		450	
W		350	
t		190	



④			
A-2			
コンクリート殻寸法			
	設計値	実測値	差
L		450	
W		350	
t		190	

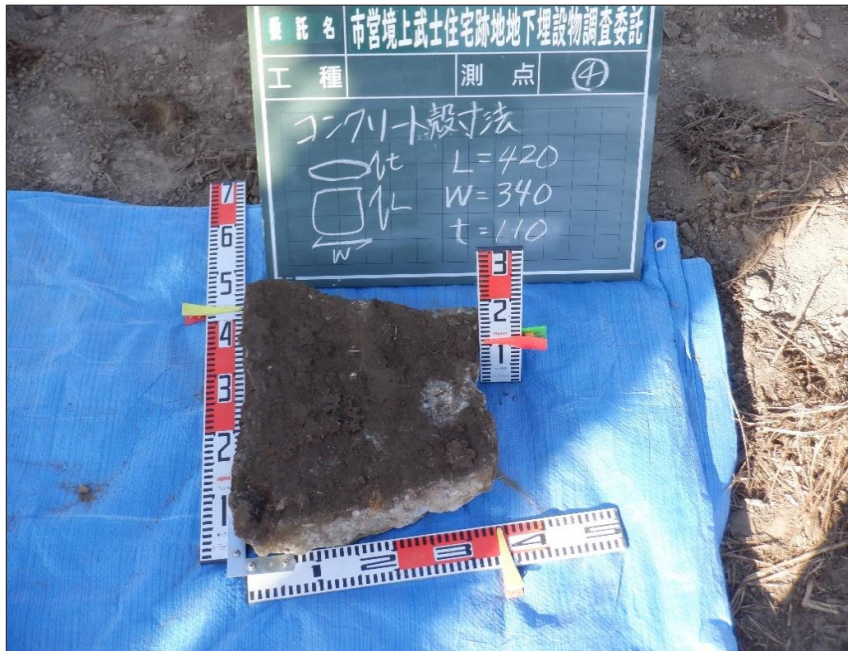


④			
D-2			
コンクリート殻寸法			



④			
D-2			
コンクリート殻寸法			
	設計値	実測値	差
L		420	
W		340	
t		110	



④			
D-2			
コンクリート殻寸法			
	設計値	実測値	差
L		420	
W		340	
t		110	

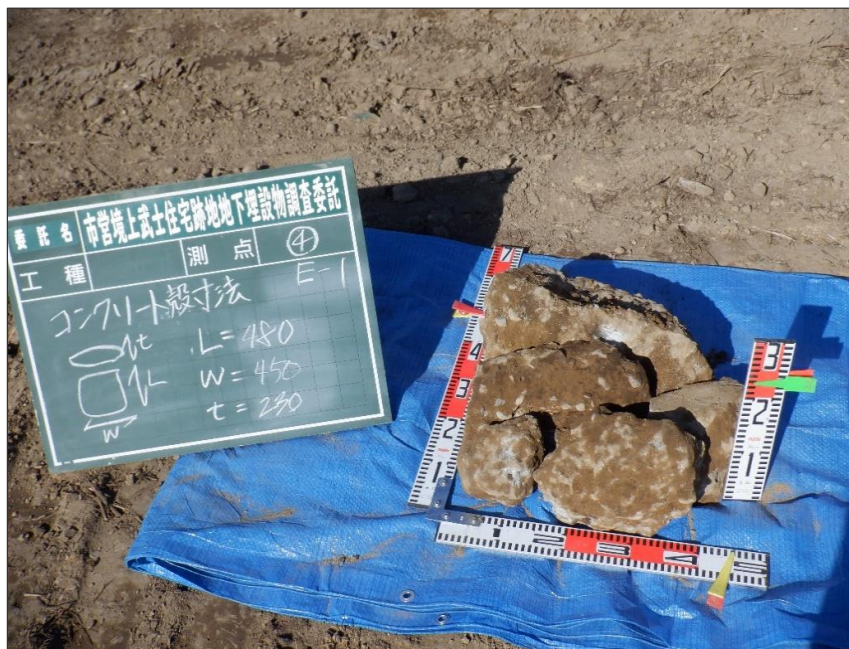

④			
E-1			
コンクリート殻寸法			
	設計値	実測値	差
L		480	
W		450	
t		230	



④			
E-1			
コンクリート殻寸法			
	設計値	実測値	差
L		480	
W		450	
t		230	



④			
E-1			
コンクリート殻寸法			
	設計値	実測値	差
L		480	
W		450	
t		230	





⑤
F-1
コンクリート殻寸法



⑤
F-1
コンクリート殻寸法




⑤
F-1
コンクリート殻寸法



⑦			
A-2			
コンクリート殻寸法			
	設計値	実測値	差
L		500	
W		500	
t		190	



⑦			
A-2			
コンクリート殻寸法			
	設計値	実測値	差
L		500	
W		500	
t		190	

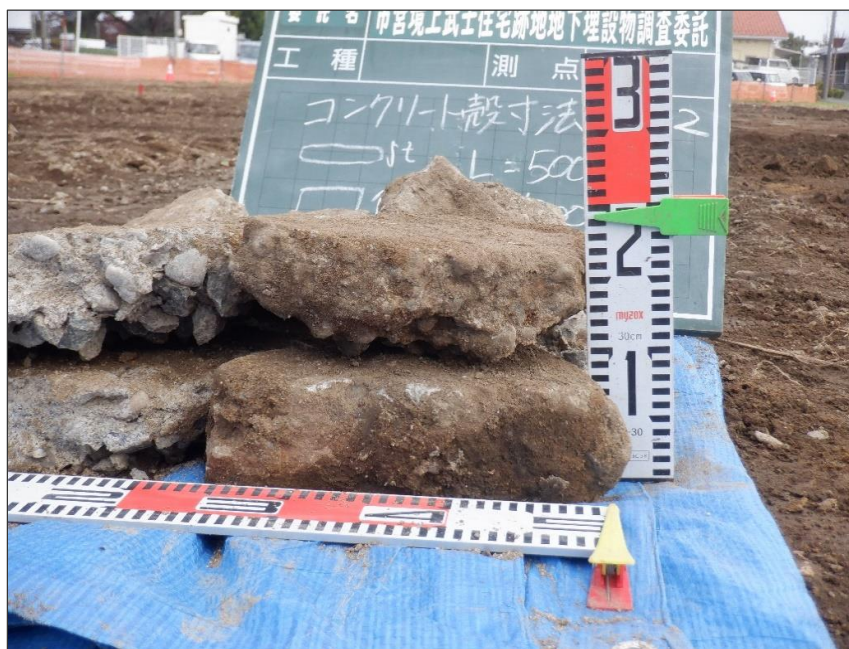

⑦			
A-2			
コンクリート殻寸法			
	設計値	実測値	差
L		500	
W		500	
t		190	





⑦			
D-2			
アスファルト殻寸法			
	設計値	実測値	差
L		430	
W		580	
t		140	



⑦			
D-2			
アスファルト殻寸法			
	設計値	実測値	差
L		430	
W		580	
t		140	



⑦			
D-2			
アスファルト舗寸法			
	設計値	実測値	差
L		430	
W		580	
t		140	



⑧			
B-3			
コンクリート殻寸法			
	設計値	実測値	差
L		580	
W		700	
t		300	



⑧			
B-3			
コンクリート殻寸法			
	設計値	実測値	差
L		580	
W		700	
t		300	



⑧			
B-3			
コンクリート殻寸法			
	設計値	実測値	差
L		580	
W		700	
t		300	



⑧			
C-1			
コンクリート殻寸法			
	設計値	実測値	差
L		320	
W		400	
t		160	



⑧			
C-1			
コンクリート殻寸法			
	設計値	実測値	差
L		320	
W		400	
t		160	




⑧			
C-1			
コンクリート殻寸法			
	設計値	実測値	差
L		320	
W		400	
t		160	



⑧			
D-1			
アスファルト殻寸法			
	設計値	実測値	差
L		450	
W		470	
t		200	



⑧			
D-1			
アスファルト殻寸法			
	設計値	実測値	差
L		450	
W		470	
t		200	

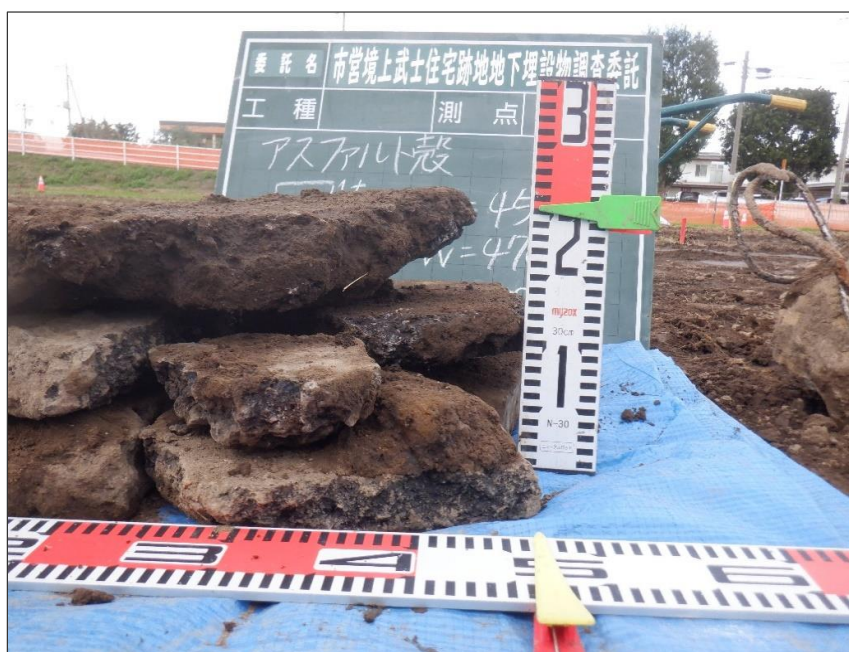

①			
D-1			
アスファルト殻寸法			
	設計値	実測値	差
L		450	
W		470	
t		200	






⑨			
B-2			
コンクリート殻寸法			
	設計値	実測値	差
L		500	
W		490	
t		270	



⑨			
B-2			
コンクリート殻寸法			
	設計値	実測値	差
L		500	
W		490	
t		270	



⑨			
B-2			
コンクリート殻寸法			
	設計値	実測値	差
L		500	
W		490	
t		270	

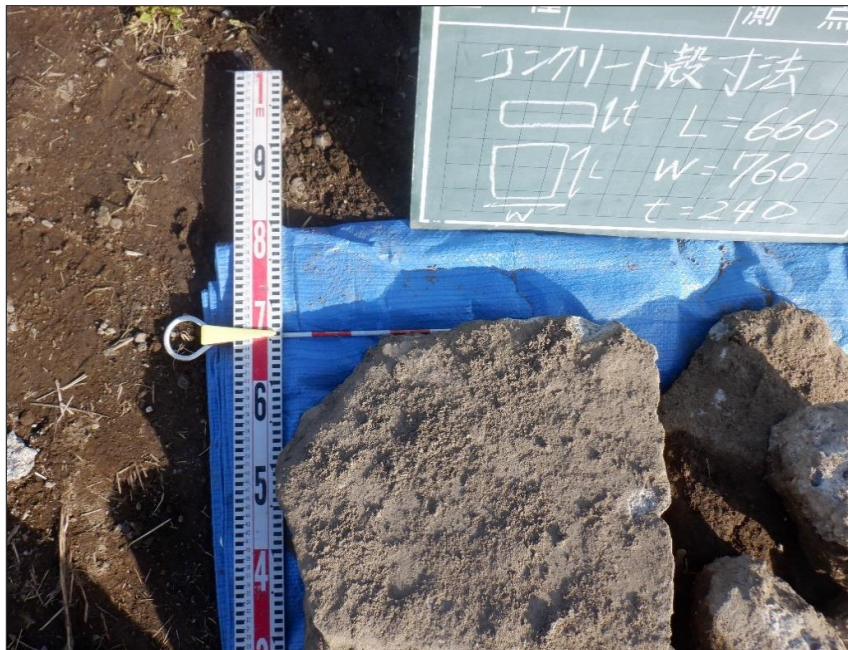



⑨			
F-1			
コンクリート殻寸法			
	設計値	実測値	差
L		1300	
W		340	
t		260	



⑨			
F-1			
コンクリート殻寸法			
	設計値	実測値	差
L		1300	
W		340	
t		260	



⑨			
F-1			
コンクリート殻寸法			
	設計値	実測値	差
L		1300	
W		340	
t		260	